
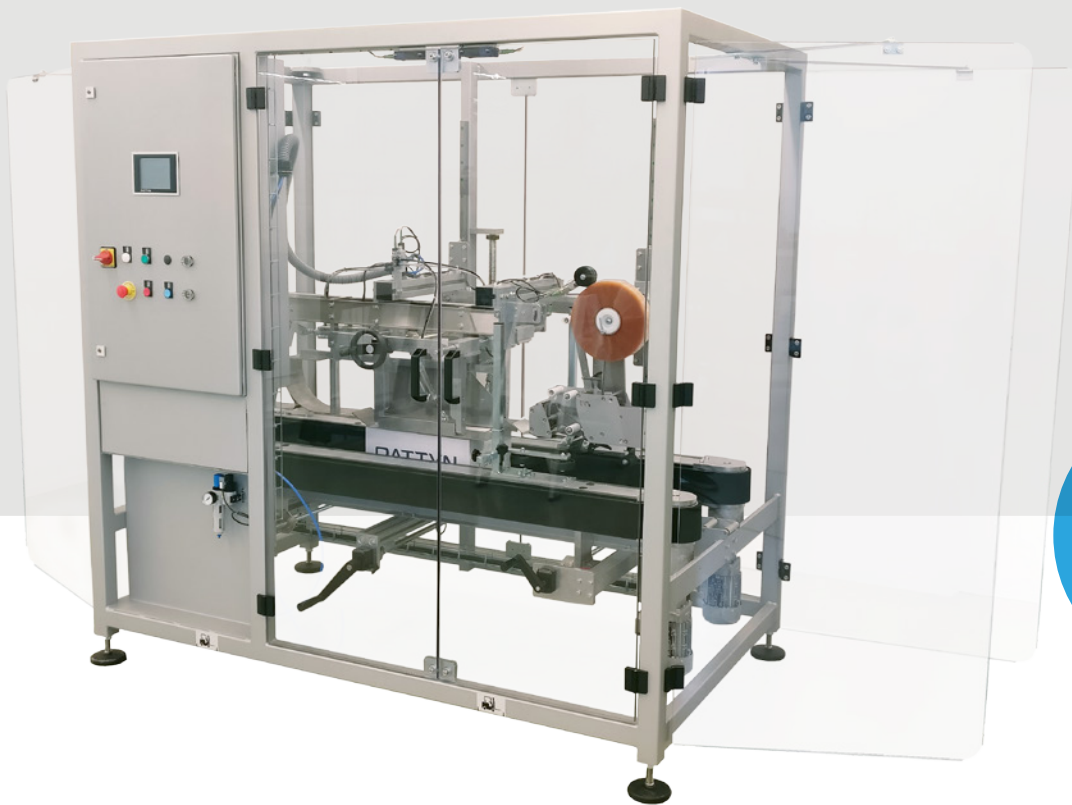


CASE CLOSER CC-11-K

The CC-11-K automatically folds the top case flaps and closes them with tape. To maximize operator convenience, the software of the case closer can be integrated in the bag closer. Also available in hot melt execution.

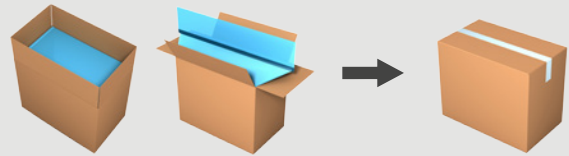

COMBINE WITH
**THE BAG
CLOSER**

Robust & easy accessible

- **Heavy duty** machine for a **reliable production**.
- **Robust taper head** with easy access for tape exchange.
- Smooth working taper head for a **wide range of adhesive tape**.

Protect your product & reduce costs

- **Perfectly controlled** case closing thanks to the pneumatic driven long flap folding.
- **High-quality components** reduce maintenance and spare parts costs to a minimum.



Watch our videos
at pattyn.com

TECHNICAL SPECIFICATIONS CC-11-K

Perfectly controlled case closing

- Case stop for rear flap folding.
- The long case flaps are joined perfectly thanks to lateral wheels.
- Pneumatic driven folding plates for long flap folding.


Heavy duty


- Direct motor driven side belts, driven by 2 motors.
- Heavy duty machine frame with easy access for maintenance.

Combine with the bag closer to save floor space

- Visualize all messages in the bag closer HMI.
- The case closer is completely controlled by the bag closer.
- One integrated safety area.
- One centralised operator panel.
- One power supply.

Standard equipped with in- and outfeed guarding and colour touch panel (HMI) for easy operation


| CASE SPECIFICATIONS (For other dimensions, please contact Pattyn) | |
|--|---|
| Range (L x W x H) mm | Min. 300 (L) x 150 (W) x 150 (H) Max. 600 (L) x 400 (W) x 400 (H) * |
|  | Outside dimensions |
| | * A special option is required for cases with height $400 < H < 600$ mm |
| TAPE SPECIFICATIONS | |
| Type | 2" inch tape |
| Tape roll length | 990 m |
| Tape roll diameter | Max. 300 mm |
| OUTPUT AND CONSUMPTION | |
| Output tape/ hot melt | Standard 15 cases/minute |
| Installed power | 1 kW tape 5 kW hot melt |
| Voltage | 3 x 400 V + N + E / 50 Hz |
| Air supply | 6 bar / 1/2" min |
| Air consumption | 10 NI/cycle |
| Weight | 600 kg |
| OPTIONS (more options are available, please contact Pattyn) | |
| Stainless steel execution | |
| 3" tape | |
| Complete detection set tape/ hot melt | |
| Flaps control section | |
| Bottom belt drive for pails | |
| Integration of software and hardware in bag closer | |
| Access point for remote support | |
| Adaptations for cases with height $400 < H < 600$ mm | |

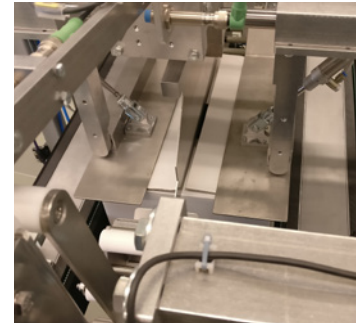

Pneumatic driven long flap folding




Robust side belts, driven by 2 motors

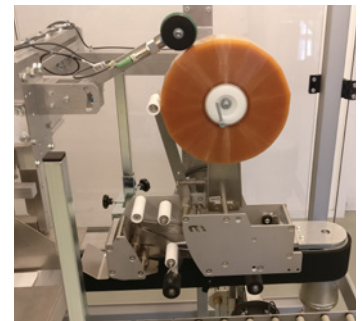


Easy tape loading system for upper taper

Right handed versions
(left handed version also possible)

Stand alone Case closer tape (H 2300 mm)

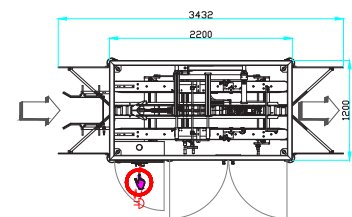

Case closer tape integrated in DS/DF

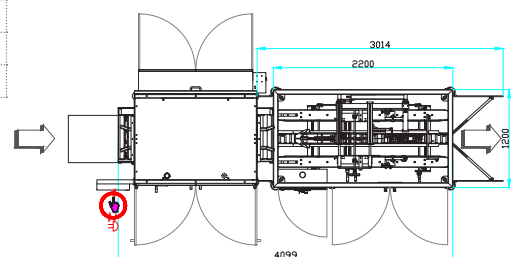

Pattyn Packing Lines nv
Industriepark 'Blauwe Toren'
Hoge Hul 2, 8000 Brugge - Belgium

T +32 (0) 50 450 480
info@pattyn.com
www.pattyn.com



The description, pictures and information given have an indicative value. We reserve the right to make changes without notice. Information and content is property of Pattyn. For customised executions please contact Pattyn. CC-11-K 2019- V01

PATTYN[®]

Turnkey solutions for industrial packaging.