

PolySto OP20F Kerb - Natural

- Hygienic and mechanical protection against light transport of wall panels in the food industry
- Protection against water infiltration to the wall panels
- Avoidance of hollow spaces that can contain bacteria
- Skirting of the wall/floor and wall/kerb junction

Application: protection of panel walls against trolleys in production area's, cold rooms,...

Food safe Sealant or bi-component Hygiseal RAL 9002

smooth and water-repellent surface

homogeneous polyester-concrete resists mechanical impact

skirting to wall-floor function according to food safety standards

Food safe Sealant or bi-component Hygiseal RAL 9002

5,3

3,3

20

sealed and fixed to floor and wall with PolySto Hard Fix Glue

Specifications

PolySto OP20F Natural is a prefabricated kerb 1000x200x53mmH with sloping top and skirting to wall-floor according the EU-requirements. The OP20F Natural kerb consists of a water repellent Polymer Composite mass (Polyester and quartz). Including matching accessories; prefabricated internal and external corners and endpieces.

Waterproof bonding using PolySto Hard Fix Glue (Hybrid Polymere). Finishing of the joints using PolySto Food Safe Sealant or PolySto HygiSeal, a 2-component polyurethane mass.

Technical information


	<u>Plinth</u>	<u>Inner corner</u>	<u>External corner</u>	<u>End piece left / right</u>
Length	100 cm	2 x 50 cm	2 x 50 cm	50 cm
Height	20 cm	20 cm	20 cm	20 cm
Thickness middle	3,3 cm	3,3 cm	3,3 cm	3,3 cm
Thickness feet	5,3 cm	5,3 cm	5,3 cm	5,3 cm
Weight	11 kg	11 kg	11 kg	5,5 kg
		2 x end piece	2 x end piece	

Consumption


Option 1: Sealant RAL 9002	250 cc / m
Option 2: Hygiseal RAL 9002	130 cc / m
Hard Fix Glue	300 cc / m
Installation pegs	4 pc / m

Packing pallet


Dimensions	120x80x70cmH
Number of meters / pallet	50 m
Number of endpieces / pallet	50 L & 50 R
Weight	570 kg

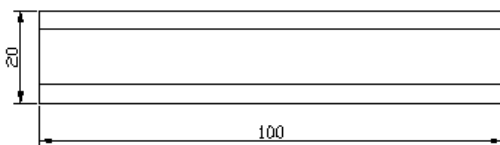

Kerb



Inner corner



External corner



End piece